

Sheet no. 1 / 2	Certificate of Conformity 1 acc. ISO 9044 6.1 / EN 10204 3.1.B				Date: 5/11/2009 Time: 11:27:30 AM																														
Sheet no. Manufacturer: TEST Weave acc. norm: ISO 9044 Frame diameter: TEST Frame material: TEST Frame depth: TEST Mesh material: TEST				Nominal aperture size: 63,0 micron Serial number: TEST Internal mark: TEST Weave: [X] Linen [] Twill weave [] Other																															
Measure procedure: optical procedure MeshCheck Theoretical measure precision:				Measure system: CIL-3x 1 Pixel = 1,0 micron																															
Results in detail No. of measured fields: 5 No. of measured openings: 120																																			
<table border="0" style="width: 100%;"> <tr> <td></td> <td colspan="4" style="text-align: center;">Tolerances acc. ISO 9044</td> <td colspan="4" style="text-align: center;">Measure result</td> </tr> <tr> <td></td> <td style="text-align: center;">Y (min)</td> <td style="text-align: center;">Y (max)</td> <td style="text-align: center;">Z</td> <td style="text-align: center;">X</td> <td style="text-align: center;">Y (min)</td> <td style="text-align: center;">Y (max)</td> <td style="text-align: center;">Z</td> <td style="text-align: center;">X</td> </tr> </table>										Tolerances acc. ISO 9044				Measure result					Y (min)	Y (max)	Z	X	Y (min)	Y (max)	Z	X									
	Tolerances acc. ISO 9044				Measure result																														
	Y (min)	Y (max)	Z	X	Y (min)	Y (max)	Z	X																											
<table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">Mesh opening warp:</td> <td style="width: 10%;">57,3</td> <td style="width: 10%;">68,7</td> <td style="width: 10%;">92,0</td> <td style="width: 10%;">115,0</td> <td style="width: 10%;">not OK</td> <td style="width: 10%;">not OK</td> <td style="width: 10%;">OK</td> <td style="width: 10%;">not OK</td> </tr> <tr> <td>Mesh opening weft:</td> <td>57,3</td> <td>68,7</td> <td>92,0</td> <td>115,0</td> <td>not OK</td> <td>not OK</td> <td>OK</td> <td>not OK</td> </tr> </table>									Mesh opening warp:	57,3	68,7	92,0	115,0	not OK	not OK	OK	not OK	Mesh opening weft:	57,3	68,7	92,0	115,0	not OK	not OK	OK	not OK									
Mesh opening warp:	57,3	68,7	92,0	115,0	not OK	not OK	OK	not OK																											
Mesh opening weft:	57,3	68,7	92,0	115,0	not OK	not OK	OK	not OK																											
<table border="0" style="width: 100%;"> <tr> <td></td> <td style="text-align: center;">Mean value</td> <td></td> <td style="text-align: center;">Min.</td> <td></td> <td style="text-align: center;">Max.</td> <td></td> <td style="text-align: center;">Standard deviation</td> <td></td> </tr> <tr> <td>Mesh opening warp:</td> <td>158,0</td> <td></td> <td>155,0</td> <td></td> <td>162,0</td> <td></td> <td>2,0</td> <td></td> </tr> <tr> <td>Mesh opening weft:</td> <td>161,0</td> <td></td> <td>155,0</td> <td></td> <td>168,0</td> <td></td> <td>3,8</td> <td></td> </tr> </table>										Mean value		Min.		Max.		Standard deviation		Mesh opening warp:	158,0		155,0		162,0		2,0		Mesh opening weft:	161,0		155,0		168,0		3,8	
	Mean value		Min.		Max.		Standard deviation																												
Mesh opening warp:	158,0		155,0		162,0		2,0																												
Mesh opening weft:	161,0		155,0		168,0		3,8																												
<table border="0" style="width: 100%;"> <tr> <td></td> <td colspan="4" style="text-align: center;">Wire diameter acc. ISO 4782 (after weaving)</td> <td colspan="4"></td> </tr> <tr> <td></td> <td colspan="4" style="text-align: center;">Tolerance</td> <td colspan="4" style="text-align: center;">Measure result (after weaving)</td> </tr> </table>										Wire diameter acc. ISO 4782 (after weaving)									Tolerance				Measure result (after weaving)												
	Wire diameter acc. ISO 4782 (after weaving)																																		
	Tolerance				Measure result (after weaving)																														
<table border="0" style="width: 100%;"> <tr> <td></td> <td style="text-align: center;">Min</td> <td style="text-align: center;">Max</td> <td></td> <td style="text-align: center;">Min</td> <td style="text-align: center;">Mean value</td> <td style="text-align: center;">Max</td> <td colspan="2"></td> </tr> <tr> <td>Wire diameter warp:</td> <td>38,5</td> <td>41,5</td> <td></td> <td>102,0</td> <td>102,0</td> <td>103,0</td> <td colspan="2"></td> </tr> <tr> <td>Wire diameter weft:</td> <td>38,5</td> <td>41,5</td> <td></td> <td>97,0</td> <td>97,8</td> <td>98,7</td> <td colspan="2"></td> </tr> </table>										Min	Max		Min	Mean value	Max			Wire diameter warp:	38,5	41,5		102,0	102,0	103,0			Wire diameter weft:	38,5	41,5		97,0	97,8	98,7		
	Min	Max		Min	Mean value	Max																													
Wire diameter warp:	38,5	41,5		102,0	102,0	103,0																													
Wire diameter weft:	38,5	41,5		97,0	97,8	98,7																													
Results of each inspection procedure Visual inspection of mesh condition OK Inspection of too big openings (X) not OK Measurements of values for * mean mesh opening (w) and tolerance (Y) not OK * number of too big openings tolerance (Z) OK																																			
Overall result: <div style="border: 1px solid black; padding: 5px; text-align: center; background-color: #f0f0f0;"> Overall result: The weave does NOT correspond to the demands of ISO 9044 </div>																																			
Weave angle: 90,2° Open area: 37,4 %				Comments																															
Inspector: Peter Müller				Signature																															




Certificate of Conformity 1

acc. ISO 9044 6.1 / EN 10204 3.1.B

Measure protocol no. -

Upper limit of a class and number of mesh openings in this class

Class	Warp		Weft	
	Count	Percent	Count	Percent
43,2	0	0,0	0	0,0
45,0	0	0,0	0	0,0
46,9	0	0,0	0	0,0
48,8	0	0,0	0	0,0
50,7	0	0,0	0	0,0
52,6	0	0,0	0	0,0
54,5	0	0,0	0	0,0
56,4	0	0,0	0	0,0
58,3	0	0,0	0	0,0
60,2	0	0,0	0	0,0
62,1	0	0,0	0	0,0
63,9	0	0,0	0	0,0
65,8	0	0,0	0	0,0
67,7	0	0,0	0	0,0
69,6	0	0,0	0	0,0
71,5	0	0,0	0	0,0
73,4	0	0,0	0	0,0
75,3	0	0,0	0	0,0
77,2	0	0,0	0	0,0
79,1	0	0,0	0	0,0
81,0	0	0,0	0	0,0
82,8	0	0,0	0	0,0
84,7	0	0,0	0	0,0
86,6	0	0,0	0	0,0
88,5	0	0,0	0	0,0
90,4	0	0,0	0	0,0
92,3	0	0,0	0	0,0
94,2	0	0,0	0	0,0
96,1	0	0,0	0	0,0
98,0	0	0,0	0	0,0
99,9	0	0,0	0	0,0
101,7	0	0,0	0	0,0
103,6	0	0,0	0	0,0
105,5	0	0,0	0	0,0
107,4	0	0,0	0	0,0
109,3	0	0,0	0	0,0
111,2	0	0,0	0	0,0
113,1	0	0,0	0	0,0
115,0	0	0,0	0	0,0
116,9	120	100,0	120	100,0

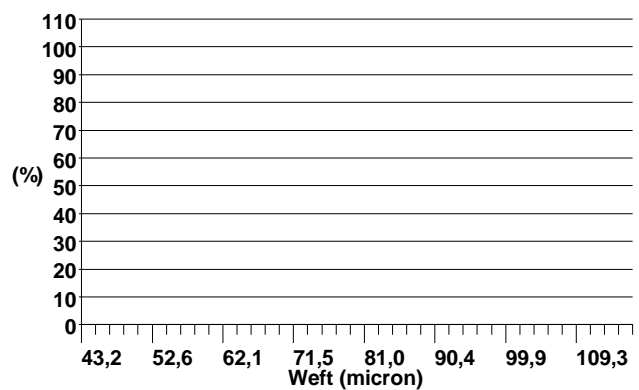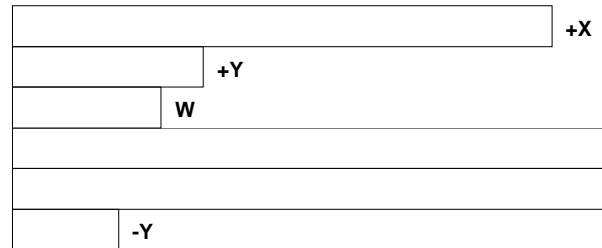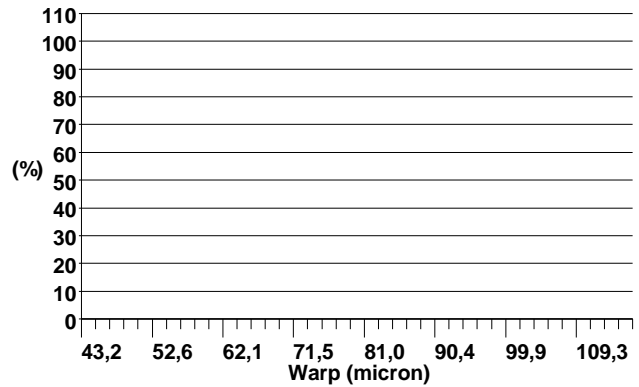

We confirm, that the used measure tools are calibrated.
EDP provided certificate - valid without signature. The factory expert. (- / -)